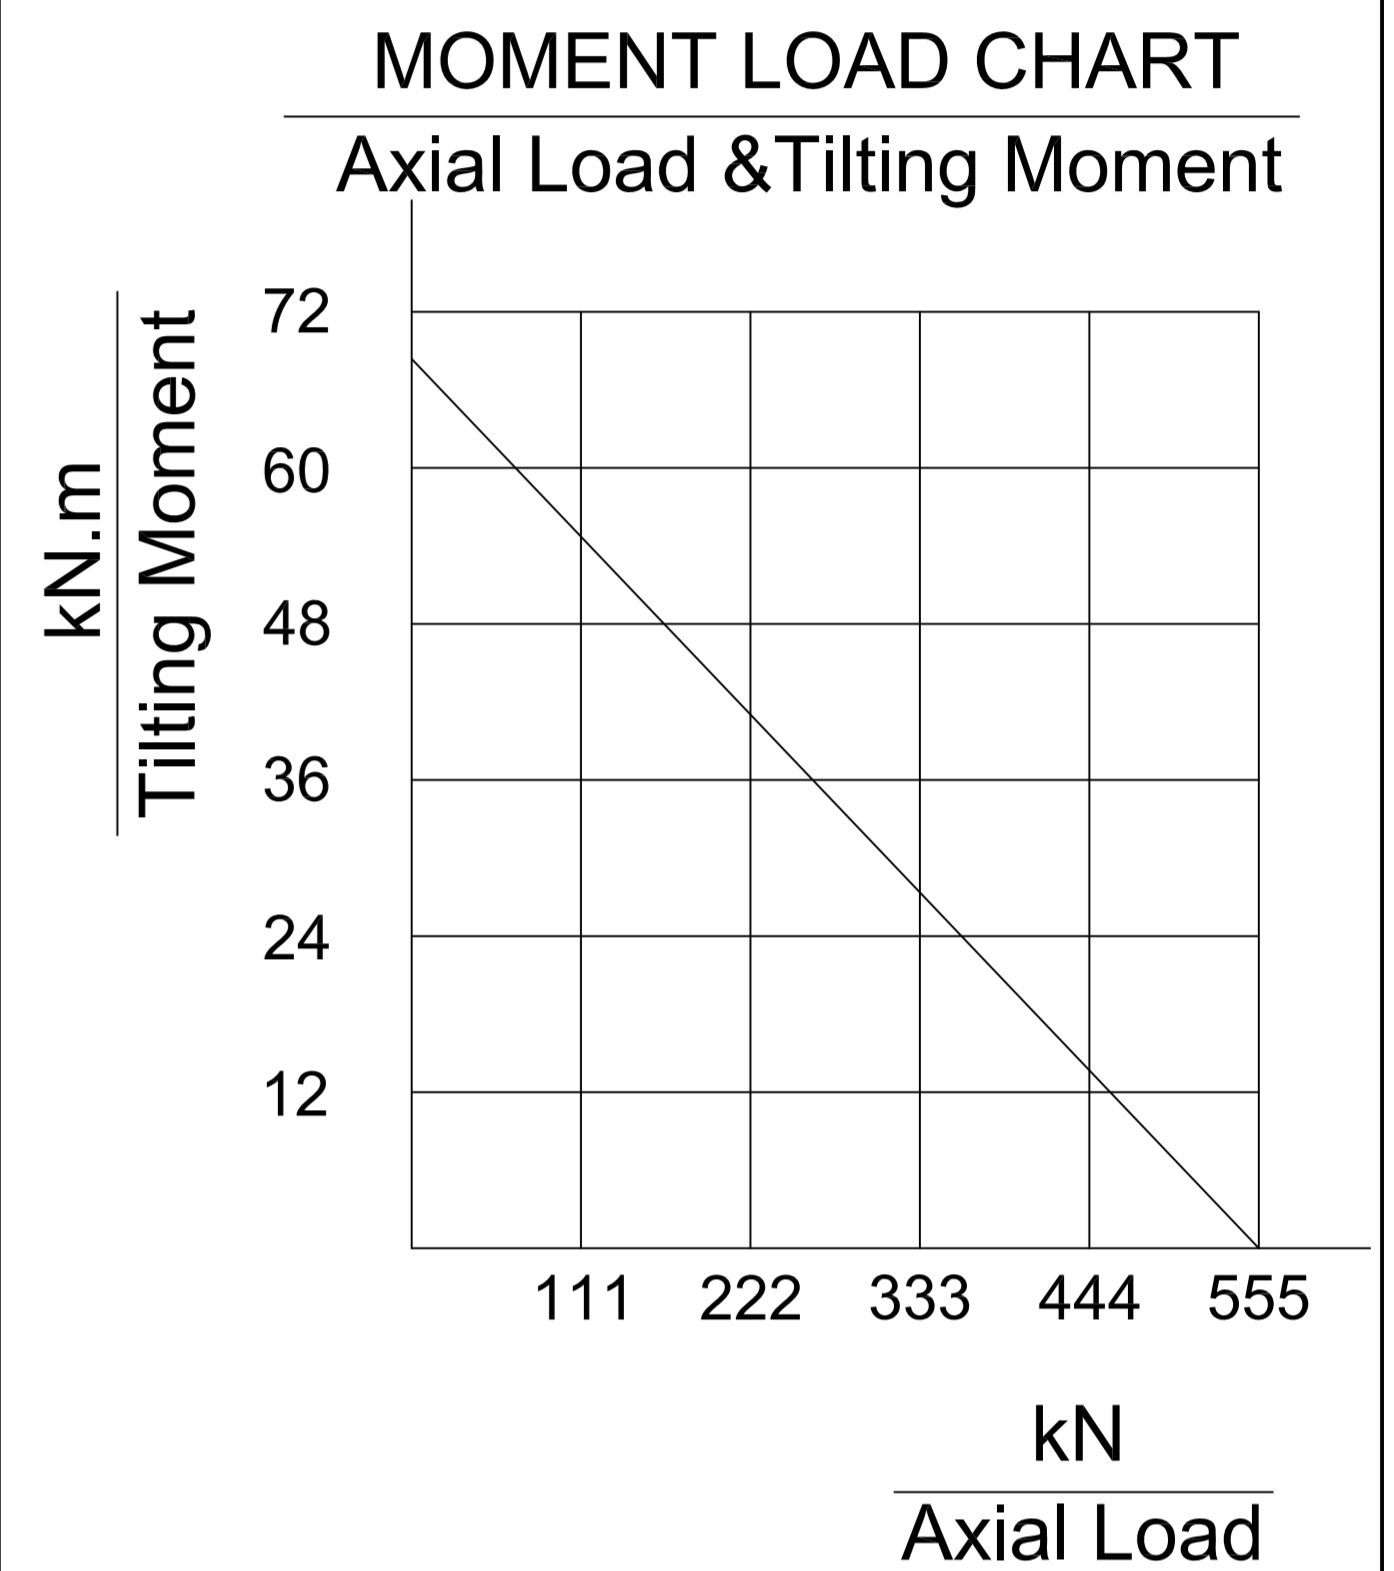

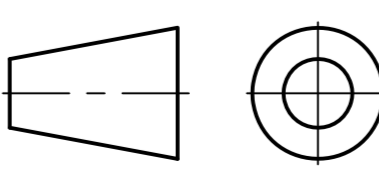


Slewing Drive Performance Parameters		
Rated Output Speed	<2.5rpm	
Output Torque (Max.)	12 kN.m	8851 lbf.ft
Tilting Moment (Max.)	67.8 kN.m	50x10 ³ lbf.ft
Holding Torque	48 kN.m	35x10 ³ lbf.ft
Static Axial Rating (Max.)	555 kN	125x10 ³ lbf
Static Radial Rating (Max.)	222 kN	50x10 ³ lbf
Gear Rating	85:1	
Precision	≤0.17°	



REV.	Date	Reviser	Description		
Designed By	2016-5-5	HXL	 Jiangyin SunSlew Machinery Equipment Co.,Ltd www.sunSlew.com		
Checked By	2016-5-5	PYN			
Approve By	2016-5-5	CMP			
The information contained in the document is property of SunSlew. SunSlew reserve changes of manufacture without previous advice and duty of communication. It is not allowable any copy or reproduction of this certificated copy with the original not under control.			WEIGHT	SCALE	Slewing Drive SDL14-2-85B-BRC
			84kg	1:4	
SYMBOLE ISO 			SIZE	A3	
			SHEET	1/1	REV A